

SMMSe / SHRMe VRF Indoor Unit MMU-AP0092H2UL—4-Way-Cassette

TOSHIBA
Carrier

Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



SMMSe / SHRMe VRF 4-Way Cassette Features

- R-410A refrigerant
- Ten sizes from 7,500 to 42,000 Btu/h
- Optional fresh air intake
- Quiet operation (as low as 31 dBA)
- Standard condensate pump with 26 in. lift capacity
- Independent louver control (fixed or swing)
- Optional wired or wireless controls
- Auto or manually set three fan speeds
- Easy to remove cleanable filter
- Five-year parts limited warranty


INDOOR UNIT MODEL		MMU-AP0092H2UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	9,500
Heating Rated Capacity	Btu/h	10,500
Fan Type (Qty)	Turbo (1)	
Airflow (L, M, H)	CFM	400 / 430 / 470
Sound Pressure (L / M / H)	dBA	29 / 30.5 / 32.5
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.021
Full Load Amps (FLA)	A	0.6
Minimum Circuit Amps (MCA)	A	0.8
Maximum Overcurrent Protection	A	15
MOTOR		
Motor Type	DC Inverter Driven	
Motor Watts	W	60

PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant	R-410A	
External Finish	Munsell 2.5GY9.0/0.5	
Unit Width	in.	33-1/8
Unit Height	in.	10-1/8
Unit Depth	in.	33-1/8
Unit Net Weight	lb	42
Panel Width	in.	37-3/8
Panel Height	in.	1-3/16
Panel Depth	in.	37-3/8
Panel Net Weight	lb	10

ACCESSORIES (Optional)

- | | |
|--|--|
| <ul style="list-style-type: none"> <input type="checkbox"/> Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL <input type="checkbox"/> Simple Wired Remote Control RBC-AS41UL <input type="checkbox"/> Integral Receiver with Wireless Remote RBC-AX32U(W)-UL <input type="checkbox"/> Stand Alone Receiver with Wireless Remote TCB-AX32UL <input type="checkbox"/> Remote Sensor TCB-TC41LUL | <ul style="list-style-type: none"> <input type="checkbox"/> Wired Remote Controller RBC-AMT32UL <input type="checkbox"/> Grille Panel RBC-U31PG(W)-UL <input type="checkbox"/> Spacer for Height Adjustment TCB-SP1602UUL <input type="checkbox"/> Air Discharge Direction Kit TCB-BC1602UUL <input type="checkbox"/> Fresh Air Chamber TCB-GFC1602UUL <input type="checkbox"/> Fresh Air Inlet Box TCB-GB1602UUL <input type="checkbox"/> Auxiliary Fresh Air Flange TCB-FF101URUL |
|--|--|

DIMENSIONAL DRAWING INDOOR UNIT 4-WAY CASSETTE MMU-AP0092H2UL

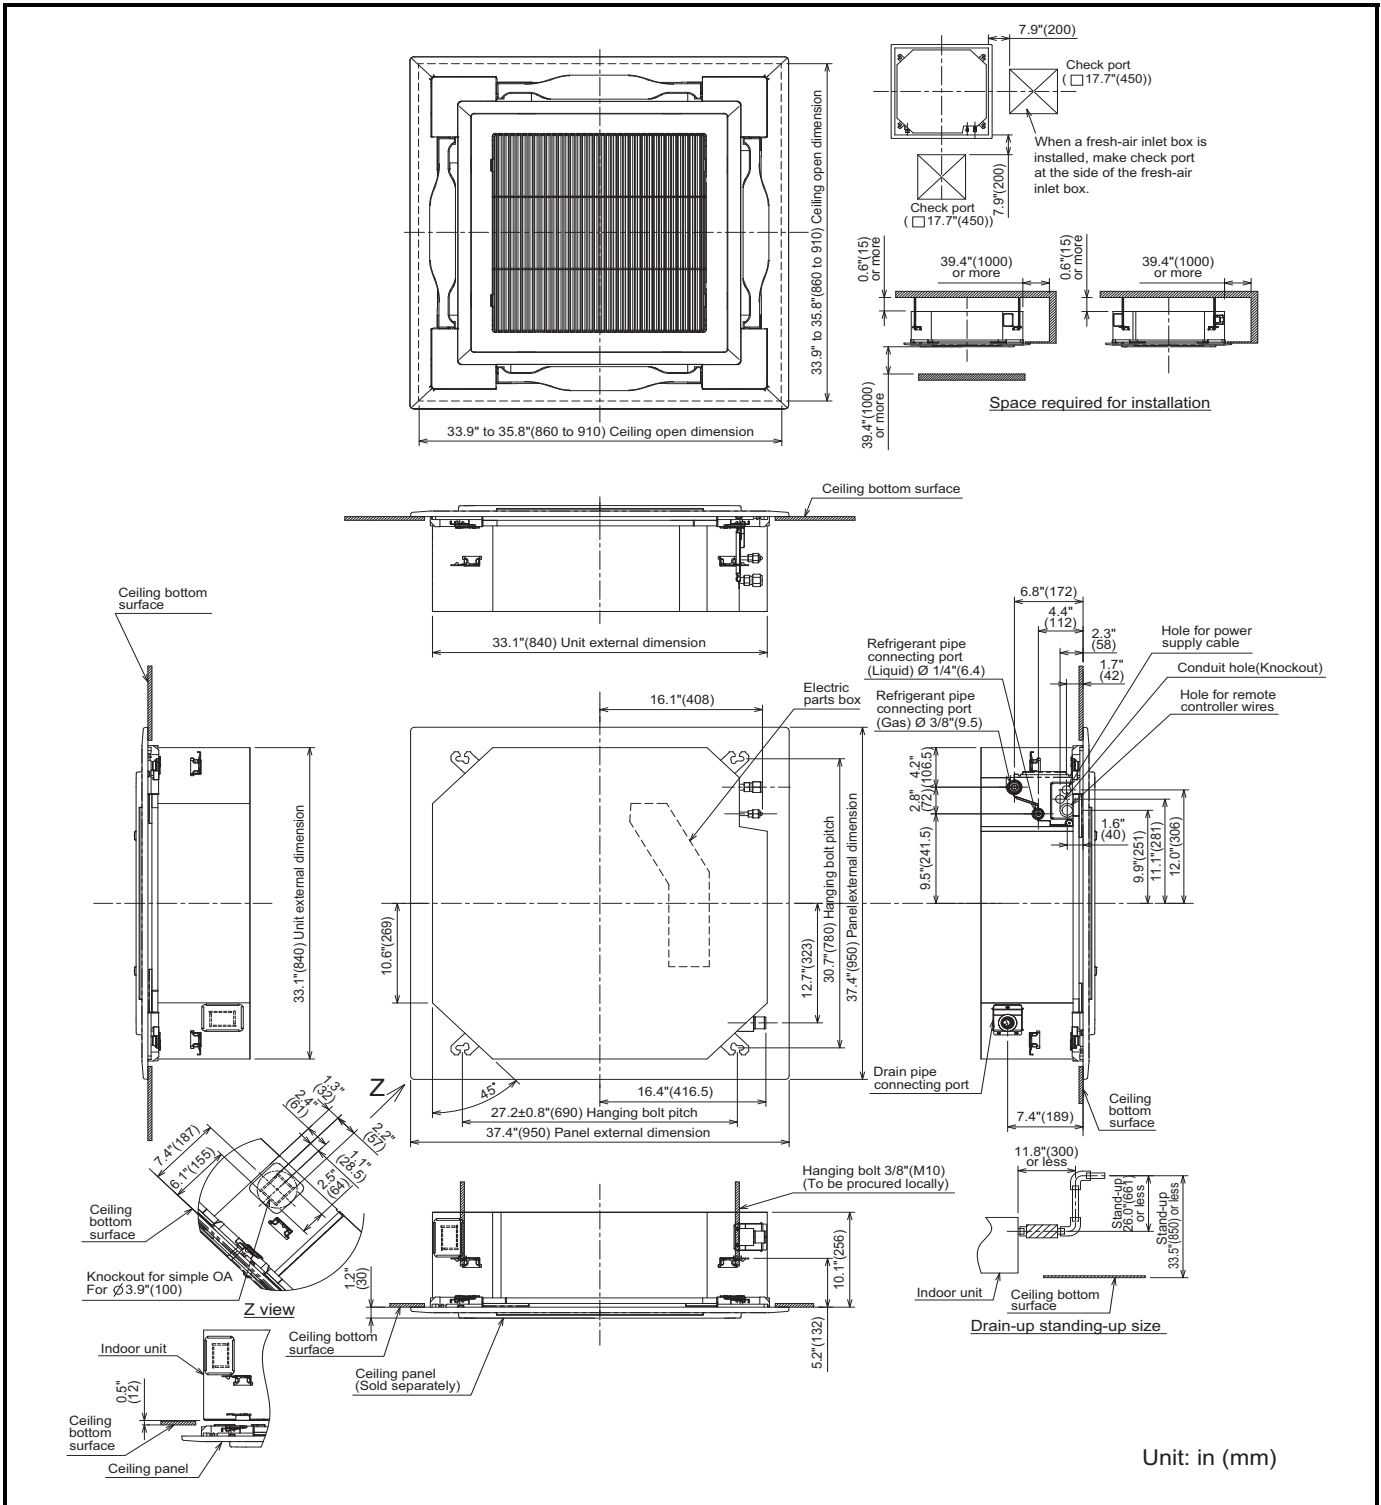

© Carrier Corporation 2018

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.
 Printed in U.S.A. Form MMU-AP0092H2UL_02 Pg 2 02-18 Replaces: MMU-AP0092H2UL_01