

VRF Indoor Unit 40VMR024---3—Floor Console



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Complete Hideaway Unit
- Three Fan Speeds - High, Medium, and Low
- Adjustable Filter Rack - up to 2"
- Max External Static Pressure (ESP) up to 0.15"
- Built in EXV (Electronic Expansion Valve) for Installation Ease

INDOOR UNIT MODEL		40VMR024---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	24,000
Heating Rated Capacity	Btu/h	27,000
Airflow (H / M / L)	CFM	776 / 635 / 553
Sound Pressure (H / M / L)	dBA	49.9 / 45.2 / 42.5
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	W	79
Minimum Circuit Amps (MCA)	A	1.38
Maximum Overcurrent Protection	A	15.0
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	54-15/16
Unit Height	in.	24
Unit Depth	in.	8-3/8
Net Unit Weight	lb	69.2

ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING INDOOR UNIT FLOOR CONSOLE RECESSED 40VMR024---3

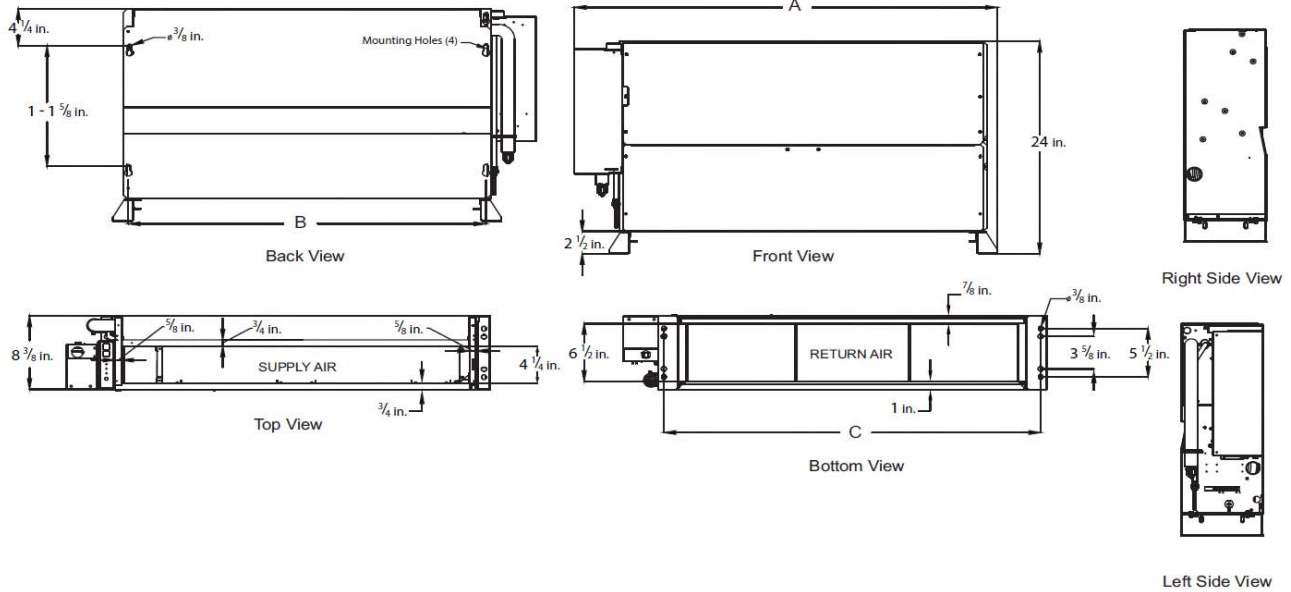

40VMR UNIT SIZE	DIMENSION (in.)		
	A	B	C
024	54-15/16	48-1/4	50-3/16

NOTE: All dimensions shown in inches.

