

# VRF Indoor Unit 40VMR015---3—Floor Console



## Submittal Data

Job Data \_\_\_\_\_ Location \_\_\_\_\_  
 Buyer \_\_\_\_\_ Buyer PO # \_\_\_\_\_ Carrier # \_\_\_\_\_  
 Unit Number \_\_\_\_\_ Model Number \_\_\_\_\_  
 Performance Data Certified By \_\_\_\_\_ Date \_\_\_\_\_



### STANDARD FEATURES

- Complete Hideaway Unit
- Three Fan Speeds - High, Medium, and Low
- Adjustable Filter Rack - up to 2"
- Max External Static Pressure (ESP) up to 0.15"
- Built in EXV (Electronic Expansion Valve) for Installation Ease


INDOOR UNIT MODEL		40VMR015---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	15,000
Heating Rated Capacity	Btu/h	17,000
Airflow (H / M / L)	CFM	500 / 424 / 347
Sound Pressure (H / M / L)	dBA	45.3 / 41.4 / 36.4
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	W	41
Minimum Circuit Amps (MCA)	A	0.83
Maximum Overcurrent Protection	A	15.0
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	43-1/8
Unit Height	in.	24
Unit Depth	in.	8-3/8
Net Unit Weight	lb	59.1

### ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

# DIMENSIONAL DRAWING INDOOR UNIT FLOOR CONSOLE RECESSED 40VMR015---3

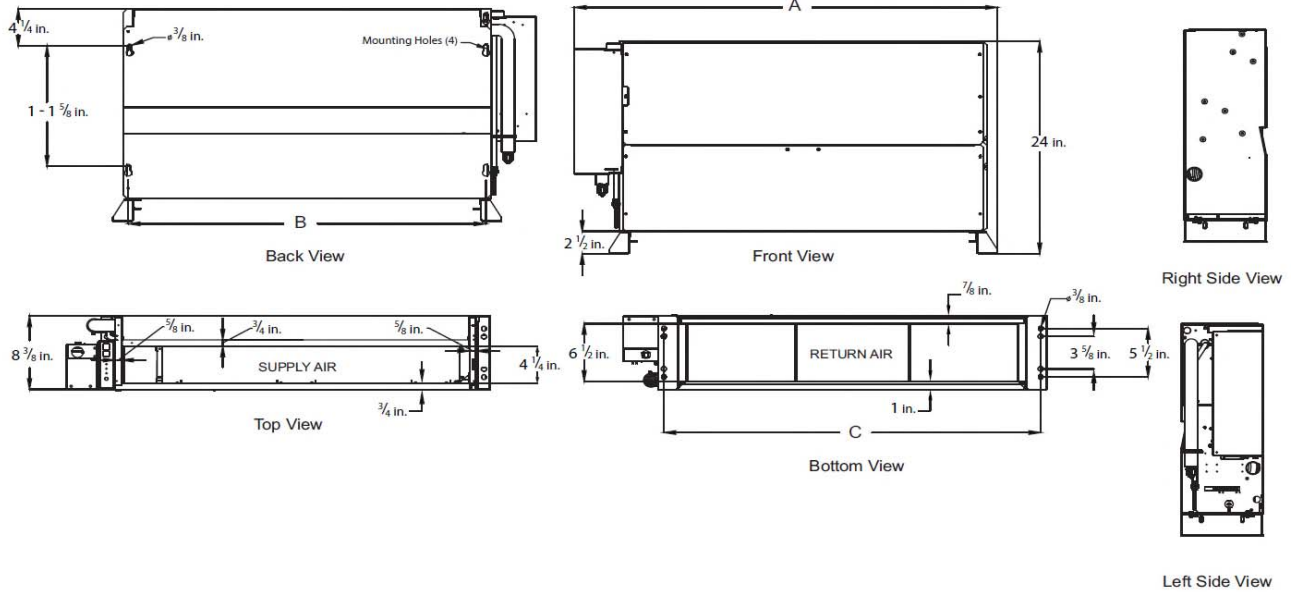

40VMR UNIT SIZE	DIMENSION (in.)		
	A	B	C
015	43-1/8	36-7/16	38-3/8

NOTE: All dimensions shown in inches.

