


# SMMS-e / SHRM-e VRF Indoor Unit MML-AP0094H2UL - Floor Console - Exposed

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Data \_\_\_\_\_ Location \_\_\_\_\_  
 Buyer \_\_\_\_\_ Buyer PO # \_\_\_\_\_ Carrier # \_\_\_\_\_  
 Unit Number \_\_\_\_\_ Model Number \_\_\_\_\_  
 Performance Data Certified By \_\_\_\_\_ Date \_\_\_\_\_

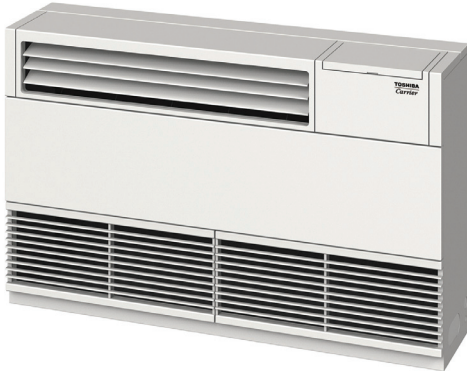

### SMMS-e / SHRM-e VRF Floor Console - Exposed Features

- R-410A Refrigerant
- Six sizes from 7,500 to 24,000 Btu/h
- Piping, wiring, and drain can be routed from side (right), bottom, or back.
- Five-year parts limited warranty

Indoor Unit Model	MML-AP0094H2UL	
<b>PERFORMANCE</b>		
Cooling Rated Capacity	Btu/h	9,500
Heating Rated Capacity	Btu/h	10,500
Fan Type (Qty)		Centrifugal (1)
Airflow ( L / M / H )	CFM	210 / 250 / 280
Sound Pressure ( L / M / H )	dBA	35 / 38 / 39 (208V) 38 / 40 / 42 (230V)
<b>ELECTRICAL</b>		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.049 (208V) 0.058 (230V)
Full Load Amps (FLA)	A	0.3
Minimum Circuit Amps	A	0.4
Maximum Overcurrent Protection	A	15
Motor Type	AC Inverter Driven	
Motor Watts		19

<b>PHYSICAL DATA</b>		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	0.8
Refrigerant	R-410A	
External Finish	Silky Shade (Munsell 1Y8.5/0.5)	
Unit Width	in.	37.4
Unit Height	in.	24.8
Unit Depth	in.	9.1
Unit Net Weight	lb	81.6

### ACCESSORIES (Optional)

- Lite Vision Plus Remote Controller (7-Day Programmable) RBC-AMS51E-ES
- Simple Wired Remote Control RBC-AS41UL
- Stand-Alone Receiver with Wireless Remote TCB-AX32UL
- Remote Sensor TCB-TC41LUL
- Wired Remote Controller RBC-AMT32UL

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

