

Horns

Overview

All units provide a cast aluminum housing tapped on one side for 1/2" conduit and include two lugs for wall mounting.

Single Projector Explosionproof AdaptaHorn

The single Projector Explosionproof AdaptaHorn is designed for use in:


Class I, Division 1, Groups C and D;
 Class I, Division 2, Groups A and B;
 Class II, Division 1, Groups E, F and G; and
 Class III, Division 1 locations

Unit includes a seamless steel projector, a 5" diameter spring steel diaphragm. A brass cover provides rigid support for the horn mechanism.

Standard Features

- **120VAC operation**
- **Heavy duty cast aluminum construction**
- **Plug-in connection**
- **CSA Certified**

Installation and Mounting

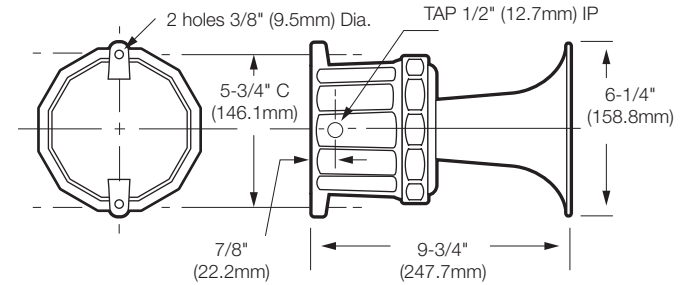


Ordering Information

Description	Cat. No.	Volts	Amps	VA	Coil Res (Ohms)	dB@10' (3M)
Adaptahorn	B-KM-8130-N5	120VAC, 60 Hz	0.45	52	24	106

Explosionproof Horns

B-KM-8130 Series

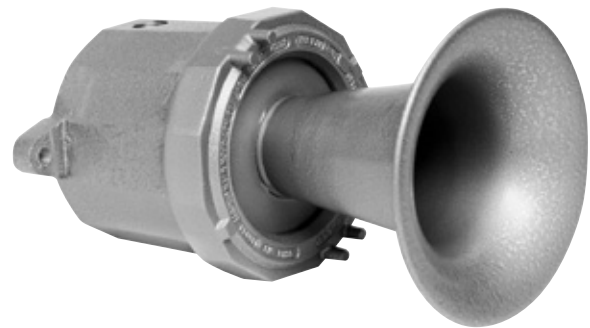

Single Projector
Explosionproof AdaptaHorn

